



Toshiba Satellite Click Tablet Battery Replacement

This guide will help you replace the battery in the tablet portion of the Toshiba Satellite Click.

Written By: Anthony



INTRODUCTION

The tablet battery is located inside the tablet itself and will require a Phillips head screwdriver, prying tool, and tweezers. Also, there are a few wires and screws that need to be removed that require patience and a steady hand.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [Tweezers](#) (1)
- [iFixit Opening Tools](#) (1)



PARTS:


- [Lithium Ion battery pack model no. PA5156U-1BRS](#) (1)

Step 1 — Tablet Battery




- Take the pry tool and pry open the backing of the tablet around all four sides and pull off back.

Step 2

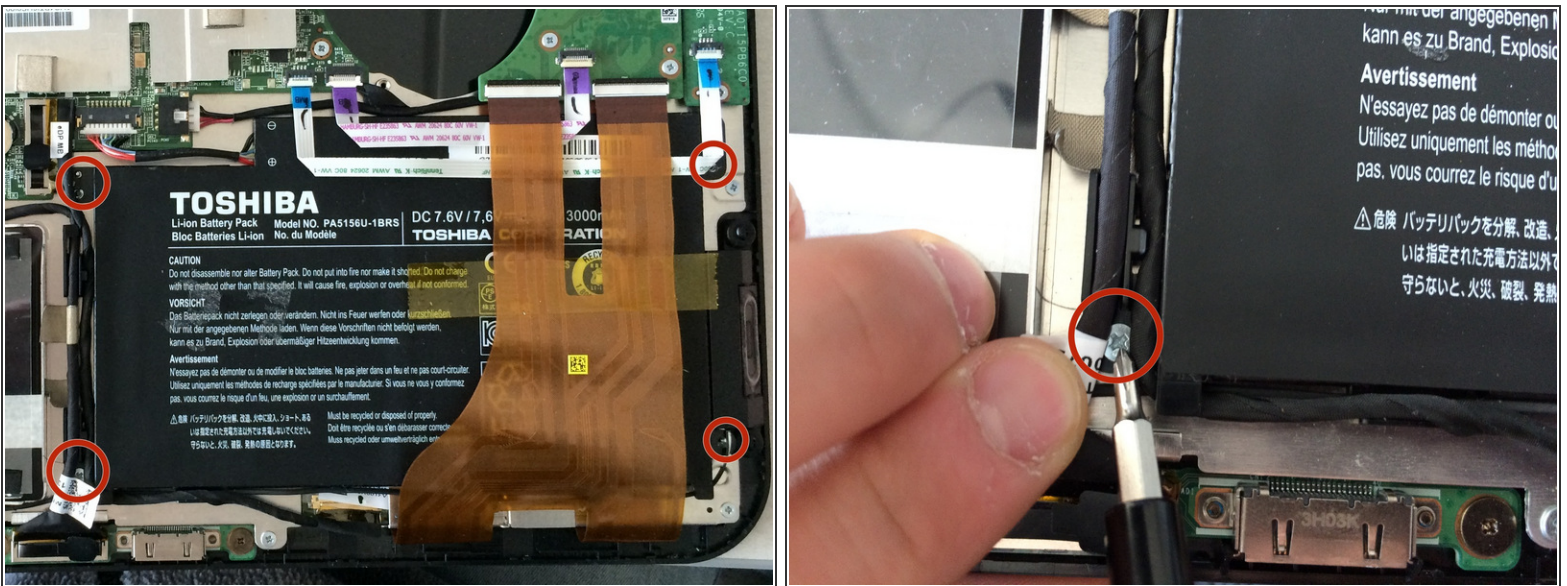


- Use a Phillips #0 Screwdriver to remove four screws in the corners of the battery pack.

Step 3

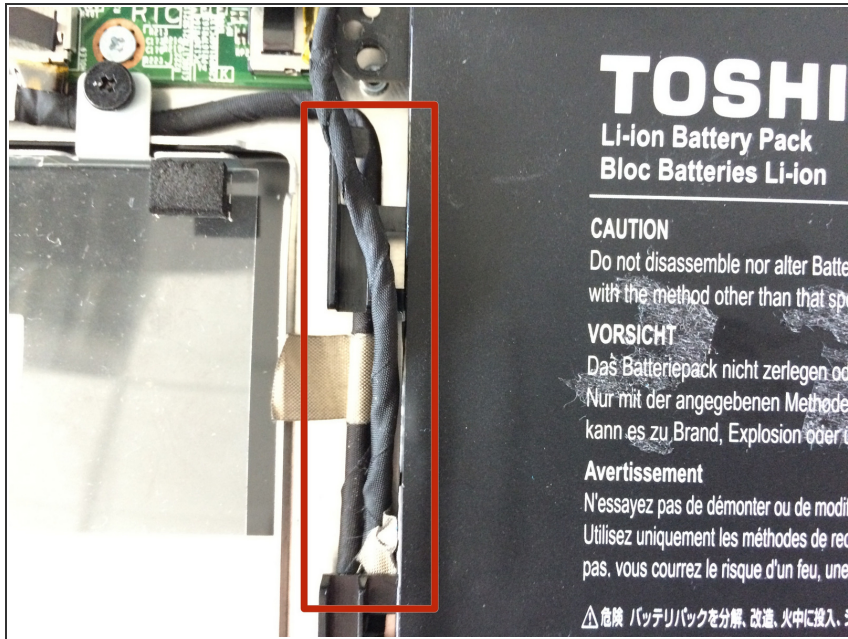

- Remove shown wires from clips on the left hand side of the battery before pulling the battery completely out.

Step 4

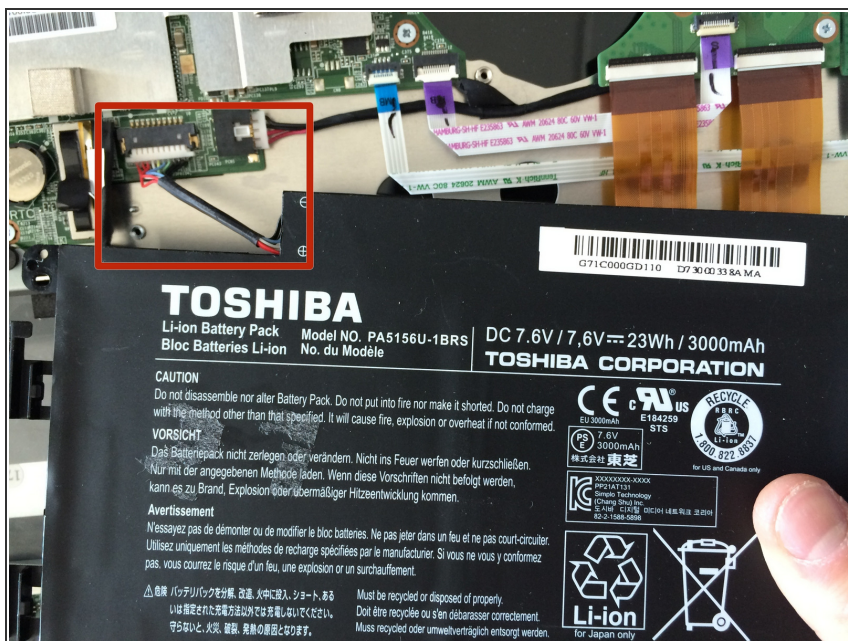

- Remove highlighted plug out of the circuit board before completely removing the battery pack.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 11:48:58 AM.